Headers(Sockets) for pluggable terminal blocks ／ ECH & EHD series

RoHS compliance

2EEHDVC

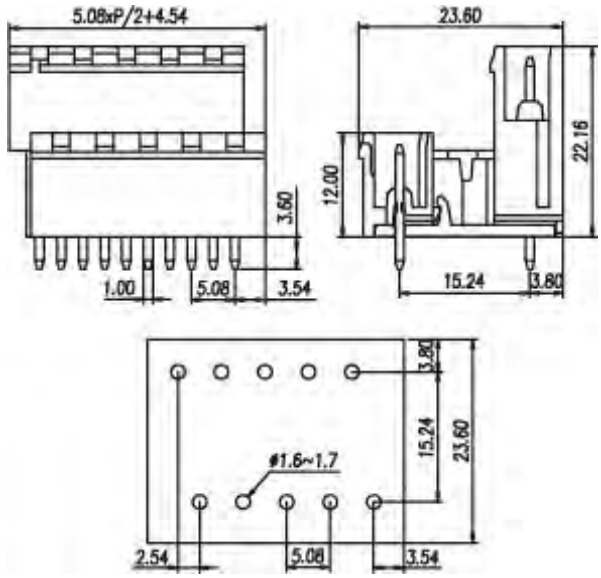

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	15A	18A
Conductor cross-section, solid (AWG/ mm^2)		
Conductor cross-section, flexible (AWG/ mm^2)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 4 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length		

Pole	Cat. No.
2x2	2EEHDVC-04P
:	:
:	:
26x2	2EEHDVC-52P

Copyright ,DINKLE ENTERPRISE CO., LTD. All Right Reserved.