Plugs for pluggable terminal blocks ／ EC & ESD series

2ESDBAM

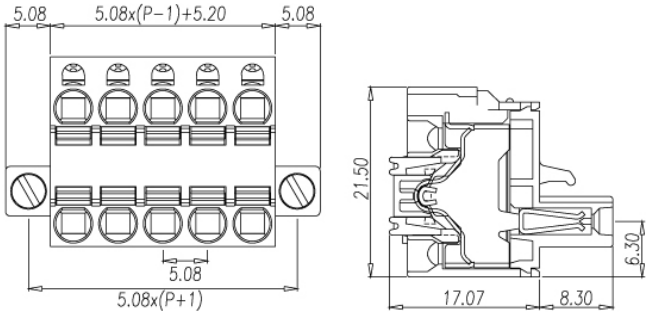

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Conductor cross-section, solid (AWG/ mm^2)	24~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm2)	24~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)		
Screw		
Wire strip length	11~12mm	

Pole	Cat. No.
02	2ESDBAM-02P
:	:
:	:
24	2ESDBAM-24P

Copyright ,DINKLE ENTERPRISE CO., LTD. All Right Reserved.