Plugs for pluggable terminal blocks ／ EC & ESD series

3ESDPM

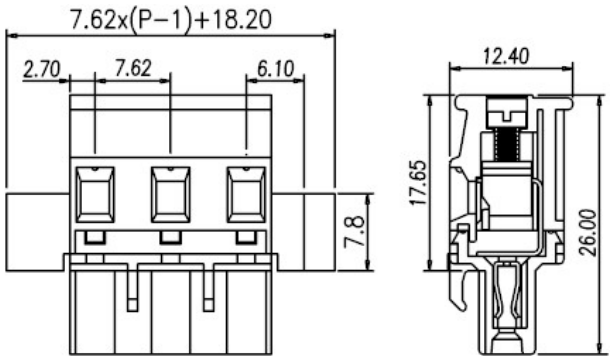

Pitch: 7.62mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	15A	17.5A
Conductor cross-section, solid (AWG/ mm^2)	28~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm2)	30~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 3/ 5 KV	
Torque (N-m))	0.51	
Screw	M2.5	
Wire strip length	7~8mm	

Pole	Cat. No.
02	3ESDPM-02P
:	:
:	:
12	3ESDPM-12P

Copyright ,DINKLE ENTERPRISE CO., LTD. All Right Reserved.